



1193 Port St Lucie Blvd., FL34952  
Phone: 240-235-0602  
E-mail: ianr@solstice-inc.com

QUOTATION

## OFFER SHEET

Category : cellophane overwrapping machine



DATE: 8-6-2018



Category	Standard Machine (Voltage support 220V 60HZ )	Change parts	Optional fitment		
			Film sliter	Waste film collet system	Tear tape system
MULTI 50	\$34,500	\$495	\$840	\$1,020	\$3,150
MULTI 50A	\$49,000	\$600	\$840	\$1,020	\$3,150
XTRA 80	\$21,800	\$450	\$840	\$1,020	\$1,350
XT 100	\$21,200	\$3,900	\$840	\$1,020	\$1,350
PRO 160	\$18,600	\$390	/	/	\$1,125
TT 200	\$16,900	\$390	/	/	\$1,125
XL 400	\$38,500	\$495	\$840	\$1,020	\$3,150
SEMI 20	\$12,500	\$300	/	/	\$825
SEMI 10	\$8,700	300	/	/	/


# Voltage of Machine

> All the listed machines support 220V 60HZ power supply now.

## Change parts update

MULTI 50		XTRA 80	
	New quotation		New quotation
			

XT 160		TT 200	
	New quotation		New quotation
			

SEMI 20	
	New quotation
	



## MULTI SERIES OVERWRAPPER

The MULTI 50 is a fully automatic trailing edge seal overwrapping machine capable of wrapping speeds of up to 50 packs per minute.



With a PLC control system, touch display, Servo and Mechanical combined system, quick change tooling combined to offer a highly flexible and efficient production machine.

Model	MULTI 50	
Capacity	10-50 packs/min	
Packing Size	L:50-300mm W:40-220mm H:20-90mm*	
Voltage	220V 60HZ	
Consumption	2.5kw	
Compressed air	0.6Mpa	

\*Modifications in one dimension may limit the size range in the other dimensions or affect the machine capacity.


### Standard fitments include:

- \* Trailing edge seal presentation
- \* PLC control with touch display
- \* Servo driven film feed system
- \* Pneumatic auxiliary system
- \* Conveyor infeed system
- \* Fast format changeover
- \* Large pack size range
- \* High reliable cam driven mechanical action system
- \* Servo motor driven axle system, packing speed adjustable
- \* Standard side-seal

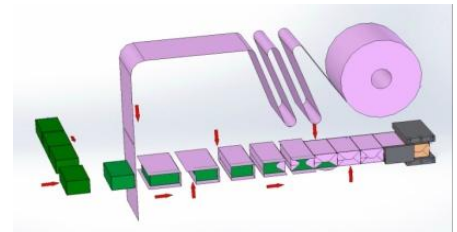


### Optional fitments include:

- \* Easy open tear tape applicator
- \* Film slitler with waste take-up
- Cosmetic quality SPOT/BAR side-seal
- Infeed conveyor either inline or side entry
- Bundling, stacking, tilting and collating system design

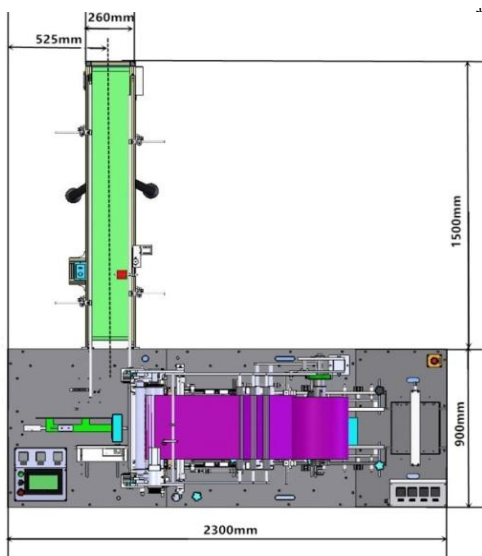

*Infeed conveyor either inline or side entry option*

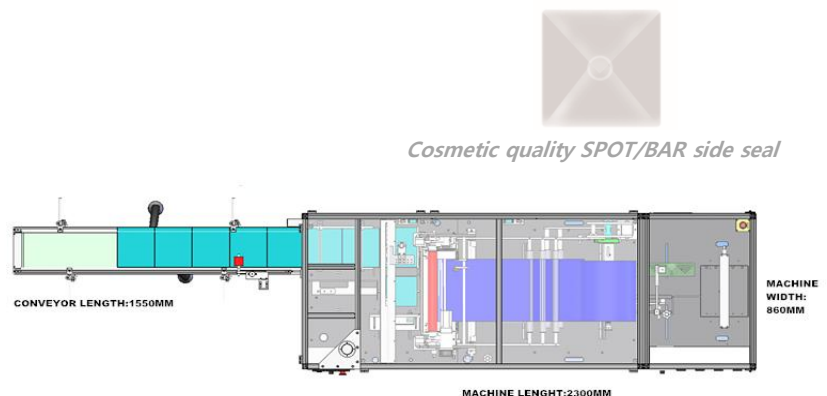

*Cosmetic quality SPOT/BAR side seal*



## MULTI SERIES OVERWRAPPER

The MULTI 50A is high-class custom-design a fully automatic trailing edge seal overwrapping machine with a "Accurate side-seal positioning system" especially design for high quality cosmetic, perfum box, with a capable of wrapping speeds up to 50 packers per minute.


With a PLC control system, touch display, Servo and Mechanical combined system, quick change tooling combined to offer a highly flexible and efficient production machine.

Model	MULTI 50A	
Capacity	10-50 packs/min	
Packing Size	L:50-300mm W:40-220mm H:20-90mm*	
Voltage	220V 60HZ	
Consumption	5.1kw	
Compressed air	0.6Mpa	

\*Modifications in one dimension may limit the size range in the other dimensions or affect the machine capacity.


### Standard fitments include:

- \* Trailing edge seal presentation
- \* PLC control with touch display
- \* Servo driven film feed system
- \* Pneumatic auxiliary system
- \* Conveyor infeed system
- \* Fast format changeover
- \* Large pack size range
- \* High reliable cam driven mechanical action system
- \* Servo motor driven axle system, packing speed adjustable
- \* Cosmetic quality SPOT/BAR side-seal
- \* Accurate side-seal positioning system

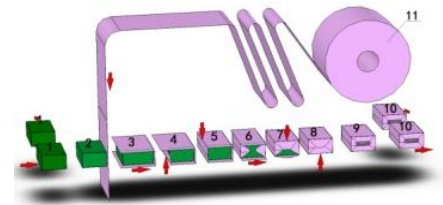

### Optional fitments include:


- \* Easy open tear tape applicator
- \* Film splitter with waste take-up
- \* Infeed conveyor either inline or side entry
- \* Bundling, stacking, tilting and collating system design

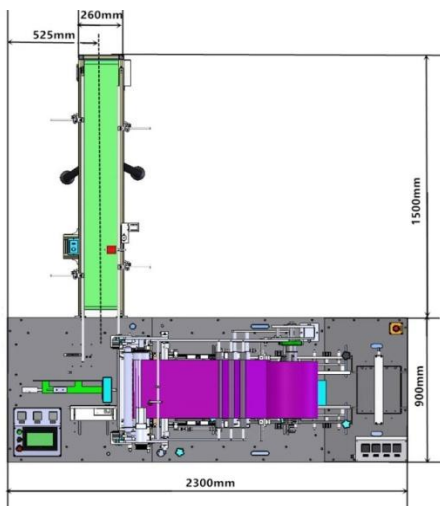


*Infeed conveyor either inline or side entry optional*



*Cosmetic quality SPOT/BAR side seal*

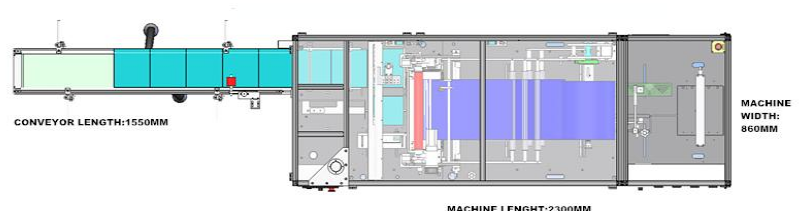

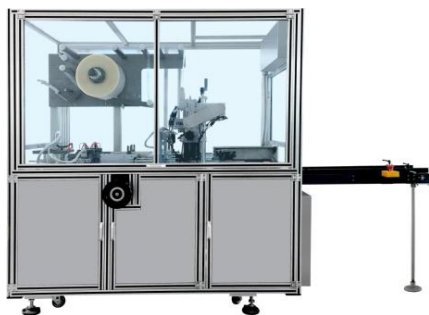

## XTRA SERIES OVERWRAPPER

The XTRA 80 Series is a fully automatic trailing edge seal overwrapping machine especially designed for medium single boxe, as well as bundles.

One level product infeed and outfeed design easy to form a complete set of production line.


With a PLC control system, HMI, servo driven film feed system, quick change tooling combined to offer a highly flexible and efficient production machine.

Model	XTRA 80	
Capacity	10-80 packs/min	
Packing Size	L:50-150mm W:25-110mm H:10-50mm*	
Voltage	220V 60HZ	
Consumption	6.5kw	
Compressed air	0.5Mpa	

\*Modifications in one dimension may limit the size range in the other dimensions or affect the machine capacity.

### Standard fitments include:

- \* Trailing edge seal presentation
- \* PLC & HMI
- \* Servo driven film feed system
- \* Pneumatic auxiliary system
- \* Conveyor infeed system
- \* Fast format changeover
- \* High reliable mechanical driven system
- \* Standard side-seal
- \* One level product infeed and outfeed


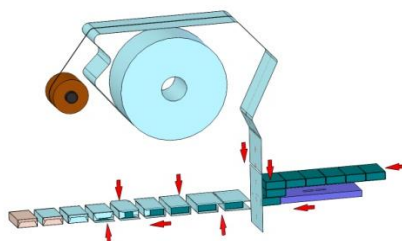


*Cosmetic quality SPOT/BAR side seal*

### Optional fitments include:

- \* Easy open tear tape applicator
- \* Cosmetic quality SPOT/BAR side-seal
- \* Bundling, stacking, tilting and collating system design

### Layout:

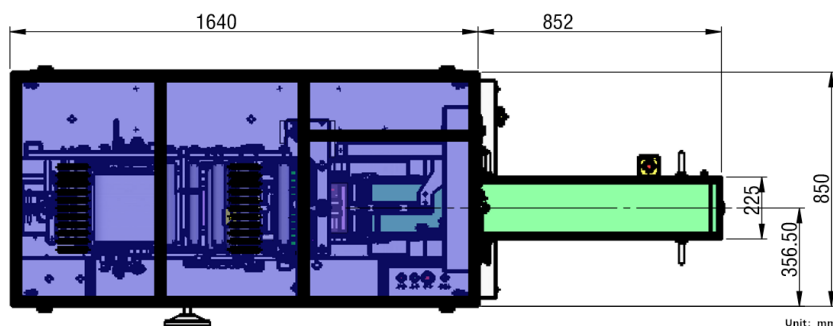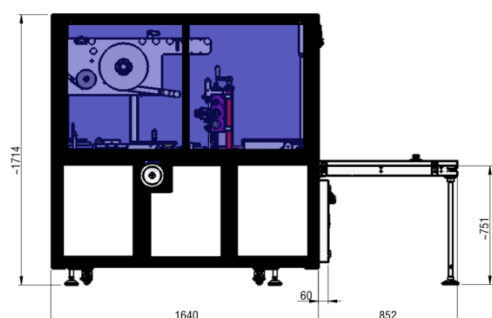


Unit: mm



## XT SERIES OVERWRAPPER

The XT 100 is a fully automatic trailing edge seal overwrapping machine supplied with an arc product infeed system, especially designed for medium size single box.


With easy machanical operation and acurate speedy gear driven film feed system, quick change tooling combined to offer a highly flexible and efficient production machine.

Model	XT 100	
Capacity	10-80 packs/min	
Packing Size	L:50-180mm W:30-120mm H:10-50mm*	
Voltage	220V 60HZ	
Consumption	6.5kw	
Compressed air	0.5Mpa	

\*Modifications in one dimension may limit the size range in the other dimensions or affect the machine capacity.

### Standard fitments include:

- \* Trailing edge seal presentation
- \* Easy Machanical operation
- \* Speedy and acurate gear driven film feed system
- \* Pneumatic auxiliary system
- \* Arc product infeed system
- \* Fast format changeover
- \* Standard side-seal
- \* Transparent or printed film
- \* Fast format changover


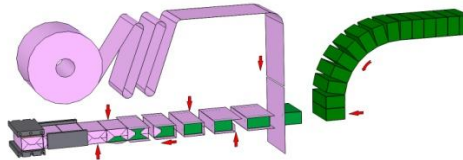


*Cosmetic quality SPOT/BAR side seal*

### Optional fitments include:

- \* Easy open tear tape applicator
- \* Cosmetic quality SPOT/BAR side-seal

### Layout

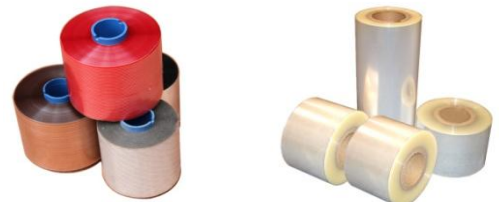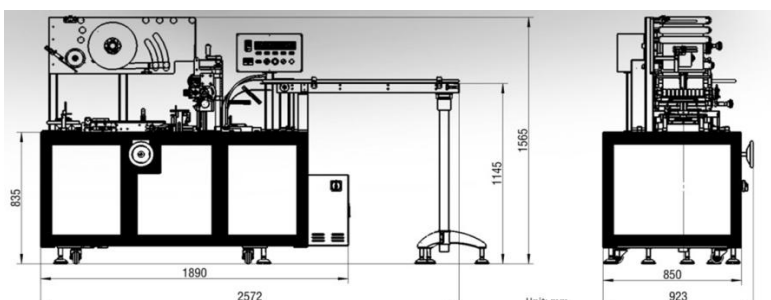



## PRO SERIES OVERWRAPPER

The PRO 160 is a high speed overwrapping machine up to 160 pcs per minutes, especially designed for small size single box, such as lipstick box (kinds make up cosmetic boxes as well), playing cards , etc...

Infeed system either inline or arc optional

With easy machanical operation and acurate speedy gear driven film feed system, quick change tooling combined to offer a highly flexible and efficient production machine.

<b>Model</b>	PRO 160	
<b>Capacity</b>	10-160 packs/min	
<b>Packing Size</b>	L:30-130mm W:20-90mm H:8-30mm*	
<b>Voltage</b>	220V 60HZ	
<b>Consumption</b>	3.8kw	
<b>Compressed air</b>	0.5Mpa	

\*Modifications in one dimension may limit the size range in the other dimensions or affect the machine capacity.



### Standard fitments include:


- \* Trailing edge seal presentation
- \* Easy Machanical operation
- \* Speedy and acurate gear driven film feed system
- \* High reliable mechanical driven technology
- \* Pneumatic auxiliary system
- \* Fast format changeover
- \* Standard side-seal
- \* Transparent or printed film



### Optional fitments include:

- \* Easy open tear tape applicator
- \* Infeed system either inline or arc optional

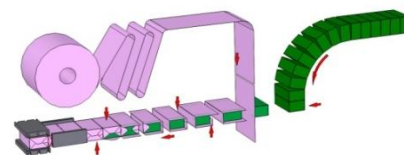

<b>Packing material</b>	Transparent printed BOPP/PVC Tear Tape	
<b>Thinkness</b>	18-30 um	
<b>Film inside diameter</b>	φ76mm	
<b>Film outside diameter</b>	≤φ330mm	






## TT SERIES OVERWRAPPER

The TT 200 is a fully automatic trailing edge seal overwrapping machine which is good at packing erasers, chewing gum, etc...

It's especially design for small size items, speed up to 200 packs per minute.

With easy machanical operation and acurate speedy gear driven film feed system, quick change tooling combined to offer a highly flexible and efficient production machine.

Model	TT 200	
Capacity	10-200 packs/min	
Packing Size	L:20-100mm W:10-50mm H:5-20mm*	
Voltage	220V 60HZ	
Consumption	2.5kw	
Compressed air	0.3Mpa	

\*Modifications in one dimension may limit the size range in the other dimensions or affect the machine capacity.



### Standard fitments include:


- \* Trailing edge seal presentation
- \* Easy Machanical operation
- \* Speedy and acurate gear driven film feed system
- \* High reliable mechanical driven technology
- \* Pneumatic auxiliary system
- \* Fast format changeover
- \* Standard side-seal
- \* Transparent or printed film



### Optional fitments include:

- \* Easy open tear tape applicator
- \* Infeed system either inline or arc optional

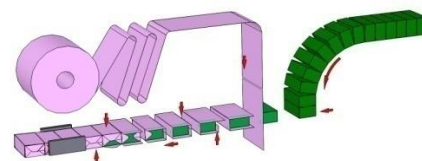

Packing material	Transparent printed BOPP/PVC film Tear Tape	
Thinkness	18-30 um	
Film inside diameter	φ76mm	
Film outside diameter	≤φ330mm	





## XL SERIES OVERWRAPPER

The XL 400 is a fully automatic trailing edge seal overwrapping machine especially design for large product, such as cosmetic gift box, etc...


With a PLC control system, touch display, Servo and Mechanical combined system, quick change tooling combined to offer a highly flexible and efficient production machine.

Model	XL 400	
Capacity	10-40 packs/min	
Packing Size	L:50-380mm W:40-280mm H:20-90mm*	
Voltage	220V 60HZ	
Consumption	11.8kw	
Compressed air	0.6Mpa	

\*Modifications in one dimension may limit the size range in the other dimensions or affect the machine capacity.


### Standard fitments include:

- \* Trailing edge seal presentation
- \* PLC control with touch display
- \* Servo driven film feed system
- \* Pneumatic auxiliary system
- \* Conveyor infeed system
- \* Fast format changeover
- \* Large pack size range
- \* High reliable cam driven mechanical action system
- \* Servo motor driven axle system, packing speed adjustable
- \* Standard side-seal



### Optional fitments include:


- \* Easy open tear tape applicator
- \* Film slitte with waste take-up
- \* Cosmetic quality SPOT/BAR side-seal
- \* Infeed conveyor either inline or side entry
- \* Bundling, stacking, tilting and collating system design

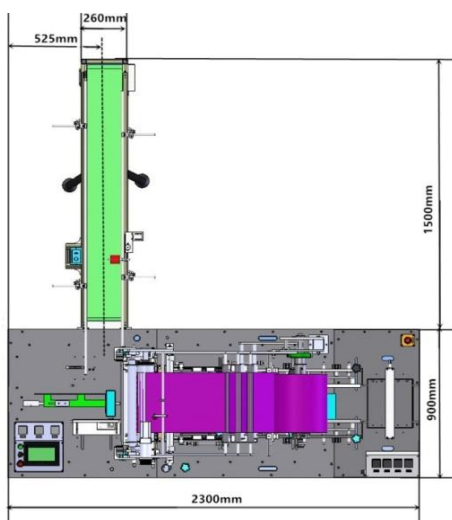

*Infeed conveyor either inline or side entry optional*



*Cosmetic quality SPOT/BAR side seal*

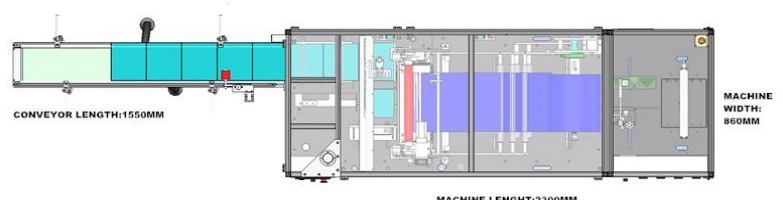


## SEMI SERIES OVERWRAPPER



The SEMI 20 is a semi automatic overwrapping with roll film feed system, simple operation and low cost, especially designed for small batches with limited investment.

The flexibility of SEMI makes it easy to wrap a large pack size, accessory to create the right solution for any packaging problem.


With a PLC control system, HMI, servo driven film feed system, simple change parts design combined to offer user a free of worry UX.

Model	SEMI 10	
Capacity	5-15 packs/min	
Packing Size	L: 50-250mm W: 40-150mm H: 25-90mm*	
Voltage	220 V 60HZ	
Consumption	1.5kw	
Compressed air	0.4 Mpa	

\*Modifications in one dimension may limit the size range in the other dimensions or affect the machine capacity.

### Standard fitments include:

- \* Mannule Trailing edge sealing
- \* Automatic Folding and Sealing
- \* PLC & HMI
- \* Servo driven film feed system
- \* Pneumatic auxiliary system
- \* Standard side-seal
- \* Large pack size range
- \* Fast format changeover
- \* High reliable mechanical driven system

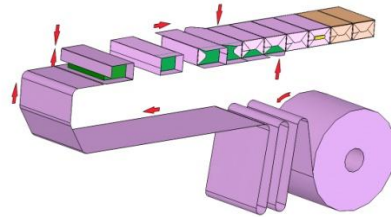


*Cosmetic quality SPOT/BAR side seal*

### Optional fitments include:


- \* Cosmetic quality SPOT/BAR side-seal
- \* Easy open tear tape applicator



HMI

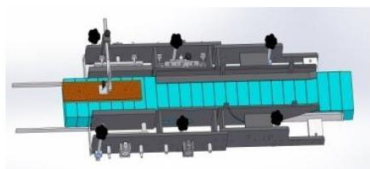

stainless steel construction



Stainless steel construction




## SEMI SERIES OVERWRAPPER

The SEMI 10 is a semi automatic overwrapping machine work with sheet film, single phase electrics, simple operation and low cost, especially designed for small batches with limited investment.

The flexibility of SEMI makes it easy to wrap a large pack size, accessory to create the right solution for any packaging problem.


With a PLC control system, HMI, servo driven film feed system, simple change parts design combined to offer user a free of worry UX.

<b>Model</b>	SEMI 10	
<b>Capacity</b>	5-15 packs/min	
<b>Packing Size</b>	L: 50-250mm W: 40-150mm H: 25-90mm*	
<b>Voltage</b>	220 V 60HZ	
<b>Consumption</b>	1.5kw	
<b>Compressed air</b>	0.4 Mpa	

\*Modifications in one dimension may limit the size range in the other dimensions or affect the machine capacity.

### Standard fitments include:

- \* Mannule Trailing edge sealing
- \* Automatic Folding and Sealing
- \* Pneumatic auxiliary system
- \* Standard side-seal
- \* Large pack size range
- \* Fast format changeover
- \* High reliable mechanical driven system

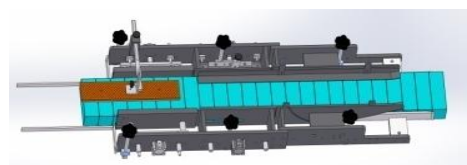

*Cosmetic quality SPOT/BAR side seal*

### Optional fitments include:

- \* Cosmetic quality SPOT/BAR side-seal